

LAWN & GARDEN

The newest and possibly the best turf and garden tire on the market today is the Kenda K500 Super Turf. It has been designed with siped lugs for greater traction and less turf damage. It also has more rubber on the contacting surface than most competitor products, which equates to enhanced puncture resistance and longer tread life. The K500 is available in a round shoulder design for steering applications and the semi-square design for drive applications. This tire comes standard in a 4-ply rating but is available in higher ply ratings on certain sizes. For commercial or heavy residential use, the Kenda K500 will provide "everything you want and more" in a lawn and garden tire.



K500

SUPER TURF

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH (LBS/KGS)	MAX (PSI/Kg/cm ²)	RIM (INCH)	K-SHIELD
4.10/3.50-4	2PR TL	3.7/94	10.6/268	230/105	24/1.7	4X2.75	
4.10/3.50-4	4PR TL	3.7/95	10.7/272	352/160	50/3.5	4X2.75	
11X4.00-4	4PR TL	3.9/99	10.7/271	330/150	46/3.2	4X2.75	
11X4.00-5	4PR TL	3.9/100	10.9/276	325/150	46/3.2	5X3	
13X5.00-6	4PR TL	4.8/122	12.7/322	440/200	40/2.8	6X3.5	V
13X5.00-6	6PR TL	4.9/124	13.0/330	560/255	60/4.2	6X3.5	
15X5.50-6	4PR TL	5.4/136	14.4/365	570/260	30/2.1	6X4	
15X5.50-6	6PR TL	5.6/142	14.4/366	740/335	46/3.2	6X4	
15X6.00-6	2PR TL	6.0/153	14.3/363	365/170	14/1.0	6X4.5	
15X6.00-6	4PR TL	6.2/158	14.7/374	570/260	30/2.1	6X4.5	V
15X6.00-6	6PR TL	5.9/149	14.6/372	695/315	46/3.2	6X4.5	
16X6.50-8	2PR TL	7.1/180	15.7/400	415/190	14/1.0	8X5.375	
16X6.50-8	4PR TL	7.0/178	15.7/400	620/280	28/2.0	8X5.375	V
16X7.50-8	4PR TL	7.4/188	16.5/419	627/285	24/1.7	8X5.375	
17X7.50-8	4PR TL	7.6/193	17.2/437	795/360	24/1.7	8X5.375	
18X6.50-8	2PR TL	6.7/170	17.6/447	515/235	14/1.0	8X5	
18X6.50-8	4PR TL	6.7/170	17.8/452	770/350	28/2.0	8X5.375	
18X6.50-8	6PR TL	6.7/170	18.1/460	950/430	40/2.8	8X5.375	
18X7.50-8	4PR TL	7.6/192	18.0/458	795/360	24/1.7	8X5.375	
18X8.50-8	2PR TL	8.5/215	17.7/450	515/235	10/0.7	8X7	
18X8.50-8	4PR TL	8.5/216	17.8/452	815/370	22/1.5	8X7	
18X8.50-8	6PR TL	8.5/217	17.8/452	1050/475	34/2.4	8X7	V
18X8.50-10	4PR TL						
18X9.50-8	2PR TL	9.2/234	18.1/460	695/320	12/0.85	8X7	
18X9.50-8	4PR TL	9.3/236	18.2/462	1040/470	24/1.7	8X7	
18X9.50-8	6PR TL	9.4/240	18.7/476	1320/595	36/2.5	8X7	V
20X8.00-8	4PR TL	8.7/222	19.6/498	905/410	22/1.5	8X7	
20X8.50-8	4PR TL	8.7/222	19.6/498	950/430	22/1.5	8X7	
20X10.00-8	2PR TL	9.6/245	19.1/485	750/340	10/0.7	8X7	
20X10.00-8	4PR TL	9.8/250	19.6/498	1190/540	22/1.5	8X7	
20X10.00-8	6PR TL	10.3/261	19.8/504	1540/700	34/2.3	8X8	
20X10.50-8	4PR TL	10.2/259	20.0/508	1190/540	22/1.5	8X7	
20X10.00-10	2PR TL	9.6/244	19.7/501	735/335	10/0.7	10X8	
20X10.00-10	4PR TL	9.7/246	19.7/501	1160/530	22/1.5	10X8	
21X7.00-10	4PR TL	7.1/180	20.7/525	990/450	26/1.8	10X5.5	
22X10.00-10	2PR TL	9.7/246	21.9/556	850/385	10/0.7	10X7	
22X10.00-10	4PR TL	10/254	22/560	1345/610	22/1.5	10X7	
22X9.50-12	4PR TL	8.9/226	21.7/551	1235/560	22/1.5	12X7	
22X9.50-12	2PR TL	8.8/223	22.0/560	860/390	12/0.85	12X7	
23X8.50-12	4PR TL	8.4/214	22.6/574	1120/510	22/1.5	12X7	
23X8.50-12	6PR TL	8.5/215	22.7/576	1445/655	34/2.4	12X7	
23X8.50-12	10PR TL	8.6/219	23.2/590	2390/1080	80/5.6	12X7	
23X9.50-12	2PR TL	9.7/247	23.6/599	925/420	12/0.85	12X7	
23X9.50-12	4PR TL	9.7/247	23.6/599	1375/625	24/1.7	12X7	
23X10.00-12	4PR TL	10.4/264	22.5/572	1340/610	20/1.4	12X8.5	
23X10.50-12	2PR TL	10.4/263	22.7/577	705/320	10/0.7	12X8.5	
23X10.50-12	4PR TL	10.4/264	22.4/580	1340/610	20/1.4	12X8.5	
23X10.50-12	6PR TL	10.4/265	22.9/580	1760/800	32/2.2	12X8.5	
23X10.50-12	8PR TL	10.4/265	22.8/580	2140/970	42/3.0	12X8.5	
24X9.50-12	4PR TL	9.7/247	23.6/599	1375/625	24/1.7	12X7	
24X11.50-12	4PR TL	11.3/287	23.1/587	1700/775	20/1.4	12X8.5	
24X12.00-12	2PR TL	11.5/292	23.8/605	1135/515	10/0.7	12X8.5	
24X12.00-12	4PR TL	11.4/290	23.4/595	1700/775	20/1.4	12X8.5	
24X12.00-12	6PR TL	11.5/293	24.3/616	2260/1020	32/2.3	12X8.5	
24X12.00-12	8PR TL	11.5/292	23.5/598	2925/1320	50/3.5	12X8.5	
26X12.00-12	2PR TL	12.3/312	25.4/645	1200/545	10/0.7	12X10.5	
26X12.00-12	4PR TL	12.8/325	25.8/655	1780/810	20/1.4	12X10.5	
26X12.00-12	6PR TL	12.8/325	25.9/659	2350/1070	32/2.3	12X10.5	
26X12.00-12	8PR TL	12.6/321	26.3/669	3050/1385	50/3.5	12X10.5	
33X12.5-16.5	4PR TL	12.5/318	10.0/838	2341/1062	30/2.1	16.5X10.5	

Kenda offers a variety of lawn and garden tires in sizes ranging from four inch to twelve-inch bead diameters. Round shoulder, square shoulder, chevron lugs, siped lugs, recessed lugs; several product lines and designs to meet the various application requirements of this market. All of Kenda's lawn and garden tires are designed to provide a quality, long lasting turf tire that will provide the greatest amount of traction with the least amount of turf damage. For all of your lawn and garden tire needs; Think KENDA!

LAWN & GARDEN

TURF RIDER

K358

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH (LBS/KGS)	MAX (PSI/Kg/cm ²)	RIM (INCH)	
4.10/3.50-4	2PR	TT,TL	3.8/97	10.4/264	260/120	30/2.0	4X2.5
4.80/4.00-8	2PR	TT,TL	4.8/122	16.0/406	435/200	20/1.4	8X3.75
11X4.00-4	2PR	TL	4.0/103	11.0/280	215/100	24/1.7	4X3
11X4.00-5	2PR	TT,TL	3.7/94	10.7/272	210/95	22/1.5	5X3
11X4.00-5	4PR	TT,TL	3.6/92	10.7/280	325/150	46/3.25	5X3
13X5.00-6	2PR	TT,TL	4.6/117	12.6/319	295/135	20/1.4	6X3.5
13X5.00-6	4PR	TT,TL	4.7/120	12.8/325	440/200	40/2.75	6X3.5
13X6.50-6	2PR	TL	6.1/154	12.9/328	305/140	14/1.0	6X4.5
13X6.50-6	4PR	TL	6.1/154	12.9/328	460/210	28/2.0	6X4.5
15X6.00-6	2PR	TL	6.0/152	14.4/366	365/170	14/1.0	6X4.5
15X6.00-6	4PR	TT,TL	6.1/155	14.6/372	570/260	30/2.1	6X4.5
15X6.00-6	6PR	TT,TL	6.0/152	14.2/362	745/340	46/3.2	6X4.5
16X6.50-8	2PR	TL	6.3/160	15.6/398	415/190	14/1.0	8X5.375
16X6.50-8	4PR	TL	6.5/164	15.7/404	620/280	28/2.0	8X5.375
16X7.50-8	2PR	TL	7.4/188	16.2/411	475/220	12/0.85	8X5.375
18X6.50-8	2PR	TL	6.2/158	17.2/437	515/235	14/1.0	8X5
18X8.50-8	2PR	TL	8.5/216	17.8/452	515/235	10/0.7	8X7
18X8.50-8	4PR	TL	8.5/215	18.0/456	815/370	22/1.5	8X7
18X9.50-8	2PR	TL	8.9/226	18.2/462	695/320	12/0.85	8X7
18X9.50-8	4PR	TL	9.2/233	18.8/477	1040/470	24/1.7	8X7
20X8.00-8	2PR	TL	8.9/226	18.8/478	600/270	10/0.7	8X7
20X8.00-8	4PR	TL	8.9/226	18.8/478	950/430	22/1.5	8X7
20X10.00-8	2PR	TL	9.7/246	20.0/508	750/340	12/0.85	8X7
20X10.00-8	4PR	TL	9.7/246	19.7/499	1190/540	22/1.5	8X7
20X8.00-10	2PR	TL	8.0/203	20.3/516	595/270	12/0.85	10X6
20X8.00-10	4PR	TL	8.0/203	20.3/516	895/407	22/1.5	10X6
20X10.00-10	2PR	TL	9.8/250	19.6/498	735/335	10/0.7	10X8
20X10.00-10	4PR	TL	9.3/237	20.4/519	1160/530	22/1.5	10X8
23X8.50-12	2PR	TL	8.4/213	22.8/580	705/320	10/0.7	12X7
23X8.50-12	4PR	TL	8.4/213	22.8/580	1120/510	22/1.5	12X7
23X10.50-12	2PR	TL	9.8/250	22.8/580	890/405	10/0.7	12X8.5
23X10.50-12	4PR	TL	9.8/250	22.8/580	1340/610	20/1.4	12X8.5



K358X

TURF RIDER

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH (LBS/KGS)	MAX (PSI/Kg/cm ²)	RIM (INCH)	
13X6.50-6	2PR	TL	6.2/158	12.9/330	305/140	14/1.0	6X4.5
13X6.50-6	4PR	TL	6.3/161	12.9/330	460/210	28/2.0	6X4.5
20X8.00-8	2PR	TL	8.9/227	20.0/508	560/255	10/0.7	8X7
20X8.00-8	4PR	TL	8.9/227	20.2/513	950/430	22/1.5	8X7



K367

GRASS HOPPER

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH (LBS/KGS)	MAX (PSI/Kg/cm ²)	RIM (INCH)	
18X6.50-8	2PR	TL	6.8/175	17.9/455	515/235	14/1.0	8X5.375
18X6.50-8	4PR	TL	6.7/169	17.8/451	770/350	35/2.5	8X5.375
18X8.50-8	2PR	TL	8.3/211	17.6/447	515/235	10/0.75	8X7
18X8.50-8	4PR	TL	8.3/211	17.6/447	815/370	22/1.5	8X7
18X9.50-8	2PR	TL	9.0/228	18.1/460	695/315	12/0.75	8X7
18X9.50-8	4PR	TL	9.1/230	18.9/480	1040/470	24/1.5	8X7
20X10.00-8	2PR	TL	9.4/239	20.1/511	750/340	10/0.75	8X7
20X10.00-8	4PR	TL	9.4/239	20.1/511	1190/540	20/1.5	8X7
20X10.00-10	2PR	TL	10.0/255	20.2/514	735/335	10/0.75	10X7
20X10.00-10	4PR	TL	10.0/255	20.2/514	1160/530	22/1.5	10X7



LAWN & GARDEN



K372

TURF MAX

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
9X3.50-4	2PR	TT,TL 3.7/93	9.0/231	160/75	26/1.80	4X2.75
9X3.50-4	4PR	TT,TL 3.7/94	9.0/229	230/105	50/3.50	4X2.75



K375

TURF BOSS

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
23X8.50-12	2PR	TL 7.5/191	22.3/566	705/320	10/0.70	12X7
23X8.50-12	4PR	TL 8.0/203	22.9/581	1115/510	22/1.5	12X7
23X10.50-12	2PR	TL 10.0/253	22.8/580	890/405	10/0.70	12X7
23X10.50-12	4PR	TL 10.0/253	22.8/580	1340/610	20/1.5	12X7



K382

TURF PRO

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
15X6.00-6	2PR	TL 5.8/146	14.2/361	365/170	14/1.0	6X4.5
15X6.00-6	4PR	TL 5.8/146	14.3/364	570/260	30/2.1	6X4.5
16X6.50-8	2PR	TL 6.29/160	15.68/399	415/190	14/1.0	8X5.375
16X6.50-8	4PR	TL 6.30/162	15.70/400	620/280	28/2.0	8X5.375
18X7.50-8	2PR	TL 7.5/190	18.2/462	530/240	12/0.85	8X5.375
18X9.50-8	2PR	TL 8.9/226	18.2/462	695/320	12/0.9	8X7
18X9.50-8	4PR	TL 8.9/226	18.4/468	1040/470	24/1.7	8X7
20X8.00-8	2PR	TL 9.0/228	18.8/478	600/270	10/0.7	8X7
20X8.00-8	4PR	TL 9.0/228	18.8/478	950/430	22/1.5	8X6.5
20X8.00-10	2PR	TL 8/203	20/509	595/270	12/0.85	10X6
20X10.00-8	2PR	TL 9.6/243	20.47/521	750/340	10/0.7	8X7
20X10.00-8	4PR	TL 9.6/245	20.6/524	1190/540	22/1.5	8X7



K384

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
18X7.00-8	2PR	TL 7.1/181	18.1/460	555/250	14/1.0	8X5.5
18X7.00-8	4PR	TL 7.1/181	18.1/460	770/350	28/2.0	8X5.5
18X7.00-8	6PR	TT,TL 7.2/182	18.0/457	990/450	45/3.2	8X5.5




K389

HOLE-N-1


SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
20X9.00-12	6PR	TL 8.15/207	20/508	1260/570	32/2.2	12X7
20X10.00-10	6PR	TL 9.65/245	19.8/504	1260/570	32/2.2	10X8
20X10.00-10	6PR	TL 9.6/245	19.8/504	1255/570	32/2.3	10X8

LAWN & GARDEN

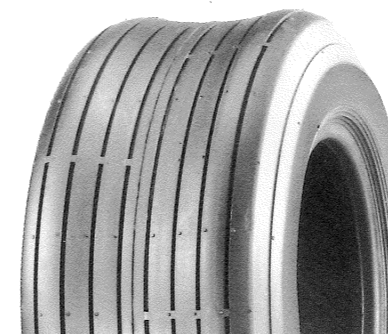


K401

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
11X4.00-4	2PR	TL 4.0/102	10.6/269	200/90	24/1.8	4X3
11X4.00-5	2PR	TT,TL 3.7/94	10.7/272	210/100	22/1.5	5X3
11X4.00-5	4PR	TT 3.7/94	10.7/272	325/150	46/3.2	5X3
13X5.00-6	2PR	TT,TL 4.6/117	12.8/325	295/135	20/1.5	6X3.5
13X5.00-6	4PR	TT,TL 4.6/117	12.8/325	440/200	40/2.8	6X3.5
13X6.50-6	4PR	TL 5.9/150	12.7/322	465/210	28/2.0	6X4.5
18X9.50-8	2PR	TL 9.1/231	18.0/457	695/320	12/0.85	8X7
18X9.50-8	4PR	TT,TL 9.1/231	18.0/457	1040/470	24/1.7	8X7
20X10.00-10	4PR	TL 9.45/240	19.69/500	1160/530	22/1.5	10X8

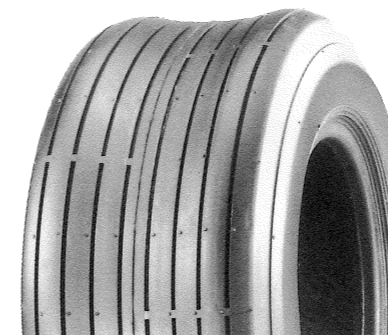

K401X

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
11X4.00-5	4PR	TL 4.0/102	10.2/260	325/150	46/3.2	5X3
15X6.00-6	4PR	TL 6.3/160	14.4/365	570/260	30/2.1	6X4.5

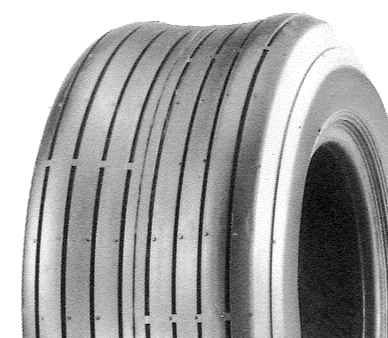

K401H

FOR HAY MACHINE

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)	K-SHIELD
15X6.00-6	2PR	TT,TL 6.2/157	14.4/366	365/165	14/1.0	6X4.5	
15X6.00-6	4PR	TT,TL 6.3/160	14.6/372	570/260	30/2.0	6X4.5	
15X6.00-6	6PR	TT,TL 6.2/157	14.6/371	745/340	46/3.2	6X4.5	
16X6.50-8	2PR	TT,TL 6.5/166	15.6/397	415/190	14/1.0	8X5.375	
16X6.50-8	4PR	TT,TL 6.6/168	15.9/404	620/280	28/2.0	8X5.375	V
16X6.50-8	8PR	TT 6.6/168	15.5/393	925/420	56/3.9	8X5.375	
16X6.50-8	10PR	TT 6.6/167	15.7/398	1067/485	70/4.8	8X5.375	
18X8.50-8	2PR	TL 8.3/211	17.6/447	515/235	10/0.7	8X7	
18X8.50-8	4PR	TT,TL 8.5/215	17.4/443	815/370	22/1.5	8X7	



K404

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)	K-SHIELD
18X9.50-8	2PR	TL 9.25/235	17.6/448	705/320	12/0.85	8X7	V
19X10.50-8	2PR	TL 9.65/245	19.8/504	705/320	12/0.85	8X8.5	V
20X10.00-10	4PR	TL 9.8/250	19.8/503	1160/530	22/1.5	10X8	

LAWN & GARDEN



K404LG

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
8X3.00-4	4PR	TL 3.0/76	8.5/216	175/80	60/4.2	4X2.1
9X3.50-4	2PR	TT,TL 3.7/94	9.0/229	160/75	26/1.8	4X2.75
9X3.50-4	4PR	TL 3.7/94	9.0/229	230/105	50/3.5	4X2.75
11X4.10-5	4PR	TL 3.9/100	11.1/283	320/145	46/3.2	5X3
11X4.10-5	2PR	TL 3.9/100	11.1/283	325/148	46/3.2	8X3
11X4.00-5	4PR	TL 3.7/95	10.9/277	325/148	46/3.2	5X2.75
13X5.00-6	4PR	TL 4.8/121	12.6/320	440/200	40/2.8	6X3.5
13X6.50-6	4PR	TL 6.1/154	13.2/336	460/210	28/2.0	6X5



K505

TURF505

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
15X6.00-6	4PR	TL 6.2/157	14.5/369	570/260	30/2.1	6X4.5
16X6.50-8	4PR	TL 6.5/166	16.0/406	620/280	28/2.0	8X5.375
18X8.50-8	4PR	TL 8.3/210	17.7/450	815/370	22/1.5	8X7
20X10.00-8	4PR	TL 9.6/244	19.4/494	1190/540	22/1.5	8X7
23X10.50-12	4PR	TL 9.6/245	22.7/576	1415/640	22/1.5	12X7
24X12.00-12	4PR	TL 12.0/306	23.9/606	1700/775	20/1.4	12X10.5
24X12.00-12	6PR	TL 12.2/310	24.0/609	2240/1020	32/2.25	12X10.5
26X12.00-12	4PR	TL 12.1/307	25.4/645	1780/810	20/1.4	12X10.5



K506

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
22X9.50-10	4PR	TL 9.3/235	21.5/546	1200/544	22/1.5	10X7
24X12.00-10	4PR	TL 11.6/294	24.0/610	1290/585	15/1.0	10X8



K507

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
24X13.00-12	4PR	TL 13.1/333	23.7/601	1730/785	18/1.3	12X10.5
26.5X14.00-12	4PR	TL 14.8/376	26.4/670	2170/985	18/1.3	12X10.5
26.5X14.00-12	6PR	TL 14.9/379	26.3/668	2657/1205	26/1.8	12X10.5



K511

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
22X11.00-8	2PR	TL		940/425	10/0.7	8X8

UTILITY



K502

TERRA TRAC

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
16X6.50-8	4PR	TL 6.5/165	15.7/398	620/280	28/2.0	8X5.375
20X10.00-8	4PR	TL 9.6/243	20.2/514	1190/540	22/1.5	8X7
18X8.50-10	4PR	TL 7.4/188	18.1/460	795/360	22/1.5	10X5.5
22X11.00-10	4PR	TL 10.9/277	22.3/567	1475/670	22/1.5	10X10
22X11.00-10	6PR	TL 11.4/289	22.2/564	1910/865	34/2.4	10X10
23X10.50-12	4PR	TL 10.2/260	23.0/583	1340/610	20/1.4	12X8.5
25X9.00-12	4PR	TL 8.8/223	24.7/627	1365/620	20/1.4	12X8.5
25X10.00-12	4PR	TL 10.0/254	25.0/635	1675/760	24/1.7	12X8
25X11.00-12	4PR	TL 10.2/259	24.7/627	1780/810	22/1.5	12X8
26X12.00-12	4PR	TL 11.6/295	25.0/635	1780/810	20/1.4	12X8.5



K513

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
18X8.50-10	4PR	TL		795/360	22/1.5	10X7
20X7.00-10	4PR	TL		825/375	22/1.5	10X5.5
20X8.00-10	4PR	TL		895/405	24/1.7	10X7
20X10.00-10	4PR	TL		1160/525	22/1.5	10X7
21X11.00-10	4PR	TL		1485/675	22/1.5	10X8
22X10.00-10	4PR	TL		1435/650	22/1.5	10X7
26X12.00-12	4PR	TL		1780/805	20/1.4	12X8.5



K467

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
23X10.50-12	4PR	TL 10.2/260	22.8/580	1340/610	20/1.4	12X8.5



K472

SHEVRON BAR

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
21X11.00-8	4PR	TL 10.87/276	21.26/540	340/155	5/0.35	8X9
22X11.00-10	4PR	TL 10.2/259	21.3/540	1385/630	22/1.5	10X8.5
24X12.00-12	4PR	TL 11.89/302	23.62/600	1700/770	20/1.4	12X8.5

GOLF CAR



K389

HOLE-N-1

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
16X6.50-8	4PR	TL 7.1/180	16.0/406	585/270	28/2.0	8X5.375
16X7.50-8	4PR	TL 7.3/186	16.1/408	605/275	24/1.7	8X5.375
18X6.50-8	4PR	TL 6.4/163	17.8/453	770/350	28/2.0	8X5.375
18X6.50-8	6PR	TL 6.4/163	17.8/453	950/430	40/2.8	8X5.375
18X8.50-8	4PR	TL 8.5/216	17.6/448	815/370	22/1.5	8X7
18X8.50-8	6PR	TL 8.6/218	17.7/452	1050/475	34/2.4	8X7



K399

PRO-TOUR

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)	E-MARK
205/50-10	4PR 73B	TL 7.7/196	18.3/465	665/302	30/2.1	10X6	*
205/50-10	6PR	TL 7.7/195	18.3/466	835/380	45/3.2	10X6	



RADIAL

K399

PRO-TOUR

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
205/35R12	4PR	TL 8.0/202	17.9/455	545/247	28/2.0	12X7
205/50R10	4PR	TL 7.4/190	18.4/468	665/302	30/2.1	10X6



K368

ROAD MASTER

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
18X8.50-8	4PR	TL 8.3/212	18.2/462	815/370	22/1.5	8X7
18X8.50-8	6PR	TL 8.3/212	18.2/462	1050/475	34/2.4	8X7
20X8.00-10	4PR	TL 7.8/198	20.3/516	895/407	24/1.7	10X6



K404

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
18X9.50-8	4PR	TL 9.3/236	18.0/458	1034/470	24/1.7	8X7


These tires were designed for heavy duty applications. When you need extra traction and bite in hard or soft terrain. You'll find them on lawn and garden tractors, tillers, riding tractors and snow blowers across the nation.

BAR & LUG




K357

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
4.80/4.00-8	2PR	TT 4.7/120	16.3/414	240/110	18/1.3	8X3.75
4.80/4.00-8	4PR	TT 4.7/120	16.4/416	340/155	32/2.3	8X3.75
4.80/4.00-8	4PR	TL 4.7/120	16.4/416	340/155	32/2.3	8X3.75
16X6.50-8	4PR	TL 6.4/163	16.7/425	615/280	28/2.0	8X5.375

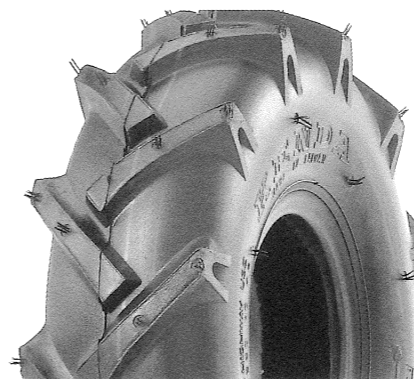


K357A

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
3.00-4	2PR	TT 3.3/85	10.6/270	155/70	26/1.8	4X2.5
4.00-4	2PR	TT 3.8/97	12.2/310	220/100	20/1.40	4X3
3.50-6	4PR	TT 3.7/94	13.4/340	365/165	42/3.0	6X2.5
3.50-8	2PR	TT 3.7/93	15.1/384	375/170	28/2.0	8X3

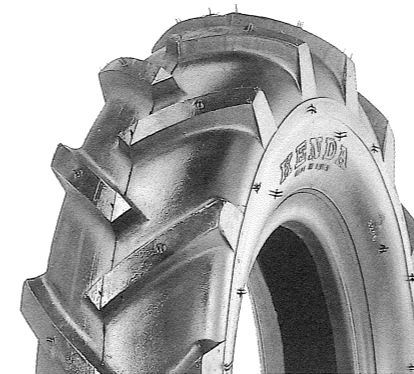

K359

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
4.00-8	2PR	TT 4.7/119	16.2/412	240/110	18/1.3	8X3.75
4.00-8	2PR	TL 4.7/119	16.2/412	240/110	18/1.3	8X3.75
4.00-8	4PR	TT 4.7/119	16.2/414	340/155	32/2.3	8X3.75
13X5.00-6	2PR	TL 4.5/114	12.8/325	295/135	20/1.4	6X3.5
17X8.00-8	4PR	TL 7.4/188	17.8/453	815/370	22/1.5	8X5.375
18X8.00-8	2PR	TL 8.3/210	17.3/440	515/234	10/0.7	8X7
18X8.00-8	4PR	TL 8.3/210	17.3/440	815/370	22/1.5	8X7
21X11.00-8	2PR	TL 10.8/274	20.3/515	900/410	10/0.7	8X9
21X11.00-8	4PR	TL 11.1/283	20.6/522	1430/650	22/1.5	8X9

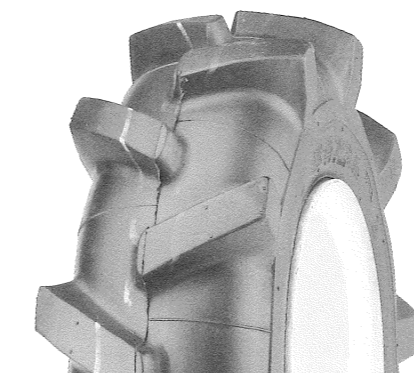

K361

SIZE	PLY RATING	S.W. (INCH/MM)	O.D. (INCH/MM)	MAX LOAD CAPACITY AT 10MPH/16KPH(LBS/KGS)	MAX (PSI/Kgf/cm ²)	RIM (INCH)
3.50-5	2PR	TT 3.6/91	12.2/310	154/70	18/1.3	5X2.5